




Nosing Covers

Short Description

Stair nosing covers are ideal for use in any high traffic area, helping to minimise the risk of slips, trips and falls. Designed for new projects and refurbishments, the simple design allows for quick and easy installation, ensuring limited downtime and disruption. All our nosing covers are manufactured from high quality fibreglass, ensuring longevity and maximum protection.

Product Images

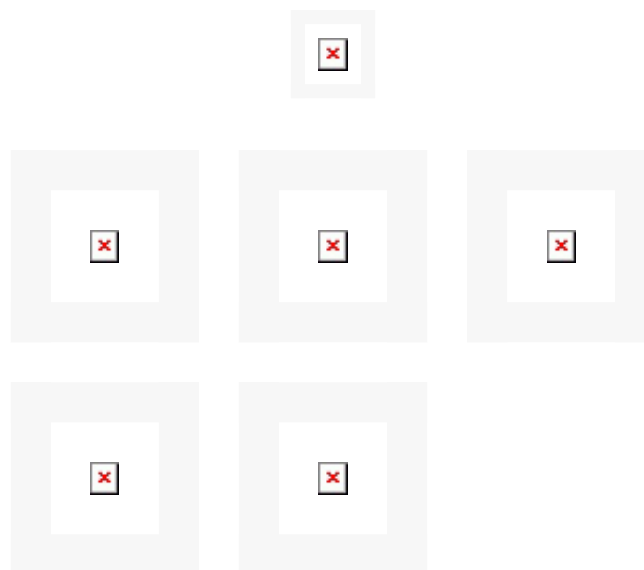

Description

- Moulded fibreglass stair tread cover with 87° degree angle and chamfered edge
- Robust construction to withstand heavy usage and harsh environments
- Impregnated silica grit surface protects against delamination - a common problem with metal backed alternatives
- Fire-retardant additives ensure excellent fire and heat resistance, conforming to ASTM E84
- Overall 4mm thickness
- Available in bespoke lengths up to 3m, with additional options of drilling and countersinking

Specifications

Wear Resistant	Wear resistant surface to Level 3
Slip Resistance	Slip resistance Level 3
Chemical Resistant	Chemical resistant
Flame Retardant	Flame retardant
Outdoor	Suitable for outdoor use
Dry Area	Suitable for use in dry areas
Grease Area	Suitable for use in greasy areas
Heavy Areas	Suitable for use in heavy use areas
Oil Area	Suitable for use in oily and greasy areas
Wet Area	Suitable for use in wet areas

Environment

Dry Zone	Dry Zone
Wet Zone	Wet Zone
Oily/Greasy Zone	Oily/Greasy Zone
Chemical Zone	Chemical Zone

Tests

- Pendulum Test Value (PTV), Dry 82, Wet 76
- Ignitablity, tested to EN ISO 9239-1: 2010
- Radiant panel test for floorings, tested to EN ISO 9239-1
- Anti-slip, tested to BS7976.2
- ASTM E84

Product Options

Colour:	Black
	Black/Yellow
	White
	Yellow
Width:	55mm x 55mm
	70mm x 30mm
Length:	0.4m
	0.5m
	0.6m
	0.75m
	1m
	1.5m
	2m
	3m