WEATHERGUARD SITE FLEX & JUNCTION BOX

IP65 NON-CORROSIVE FITTINGS C/W FLEX & JUNCTION BOX

For fast and efficient installation, Weatherguard Site is also available pre-wired with 1m of cable and junction box. Save time and money on site.





Features

- Pre-wired with 1m cable and junction box
- Fast and easy to install
- High efficacy - 120lm/W
- Unique, future proof replaceable LED module
- Stainless steel diffuser clips as standard

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
WGS525Y-E/PC	Weatherguard Site 1500mm c/w Flex & Junction Box & 3HR Emergency	3000lm	275 lm	25W	120 lm/W

Product Information

Warranty	3 Years
Emergency Battery Warranty	3 Years
Colour Appearance (CCT)	4000K
IP Rating	IP65
IK Rating	IK07
Emergency Battery Type	LiFePO4
Voltage	110V
Material (Body/Housing)	Polycarbonate
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra >80

Colour Finish	Yellow RAL1007
LED Life Expectancy	L70B50 30,000 Hours
Power Factor	0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	0°C to 40°C
EM Working Temperature	0°C to 40°C

Tel: 0114 279 8999 | **Email: sales@redarrowelectrical.co.uk** | redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF

This document is uncontrolled if printed, all information is subject to change. Generated on 07/09/26


WEATHERGUARD SITE FLEX & JUNCTION BOX


IP65 NON-CORROSIVE FITTINGS C/W FLEX & JUNCTION BOX


Packaging Information

Dimensions (mm)	L: 1562 x W: 72 x D: 78mm
Product Net Weight (kg)	2.09 kg
Barcode	5055807623643
Box Dimensions (mm)	L: 1707 x W: 98 x D: 80 mm
Box Gross Weight (kg)	2.6 kg

Units/Outer Carton	9
Outer Carton Barcode	15055807623640
Outer Carton Dimensions (mm)	L: 1725 x W: 310 x D: 255 mm
Outer Carton Gross Weight (kg)	24 kg

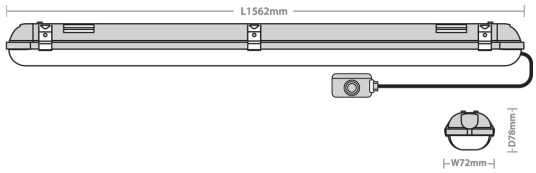

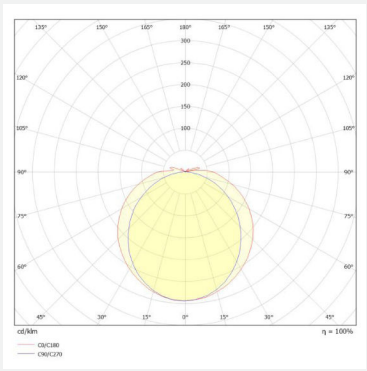

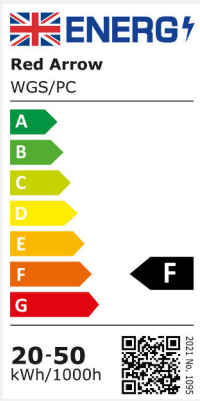

This document is uncontrolled if printed, all information is subject to change. Generated on 07/09/26