
FESTOON

110V EXTENDABLE FESTOONS

Our Connectable Festoon Kit range includes 12m, 22m and 50m lengths. All kits use our unique connector and can be joined in any combination, up to a total length of 150m. This makes extending the festoon on site simple and easy, saving time and money.



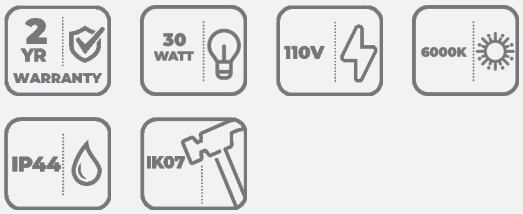

Features

- Designed in the UK by Red Arrow
- Extendable up to 150m long
- Robust, high efficiency LED heads
- Pre-wired with industrial 3 pin plug
- IK07 rated for site applications

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
FKF1230YPW	Festoon Kit Connectable 6-Way 12m	3300lm		30W	110 lm/W

Product Information

Warranty	2 Years
Colour Appearance (CCT)	6000K
IP Rating	IP44
IK Rating	IK07
Voltage	110V
Material (Body/Housing)	Polycarbonate
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra >80

Colour Finish	Yellow RAL1007
LED Life Expectancy	L70B50 35,000 Hours
Power Factor	0.9
Frequency	50Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class II
Working Temperature	-20°C to 40°C

Tel: 0114 279 8999 | **Email: sales@redarrowelectrical.co.uk** | redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF

This document is uncontrolled if printed, all information is subject to change. Generated on 16/08/26

FESTOON

110V EXTENDABLE FESTOONS

Packaging Information

Dimensions (mm)	L: 12m Head: Ø: 75 x D: 60 mm
Product Net Weight (kg)	1.39 kg
Barcode	5055807620420
Box Dimensions (mm)	L: 240 x W: 240 x D: 107 mm
Box Gross Weight (kg)	1.77 kg

Units/Outer Carton	6
Outer Carton Barcode	15055807620427
Outer Carton Dimensions (mm)	L: 500 x W: 255 x D: 345 mm
Outer Carton Gross Weight (kg)	11 kg



