
GLOBE LIGHT

360º WORKSPACE LIGHTING

For ultimate flexibility, our Globe Light is the number one choice. Featuring 360º light distribution, the unit can be free standing, tripod mounted or suspended using the built-in hook. An emergency version offers complete peace of mind.



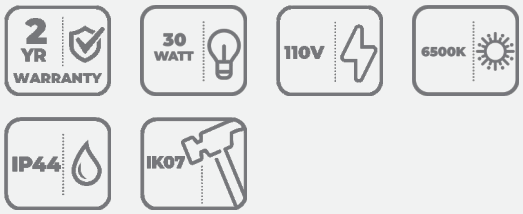

Features

- Efficient 360° light distribution
- Adjustable Tripod available to order separately
- Aux socket for interlinking or power tools
- Built-in hook for suspension mounting
- Yellow finish

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
GLS30YPW	Globe Light c/w 5m cable +plug	3300lm		30W	110 lm/W

Product Information

Warranty	2 Years
Colour Appearance (CCT)	6500K
IP Rating	IP54
IK Rating	IK07
Voltage	110V
Material (Body/Housing)	ABS
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra >80

Colour Finish	Yellow RAL1007
LED Life Expectancy	L70B50 35,000 Hours
Power Factor	0.9
Frequency	50Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-20°C to 40°C

Tel: 0114 279 8999 | **Email: sales@redarrowelectrical.co.uk** | redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF

This document is uncontrolled if printed, all information is subject to change. Generated on 18/08/26

GLOBE LIGHT

360º WORKSPACE LIGHTING


Packaging Information


Dimensions (mm)	Ø: 190 x L: 252 mm
Product Net Weight (kg)	1.86 kg
Barcode	5055807620451
Box Dimensions (mm)	L: 240 x W: 200 x D: 260 mm
Box Gross Weight (kg)	2.3 kg


Units/Outer Carton	4
Outer Carton Barcode	15055807620458
Outer Carton Dimensions (mm)	L: 420 x W: 255 x D: 545 mm
Outer Carton Gross Weight (kg)	10.5 kg





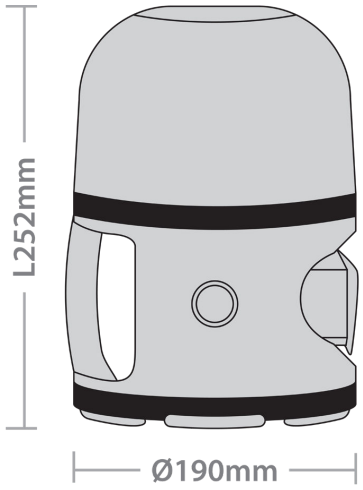

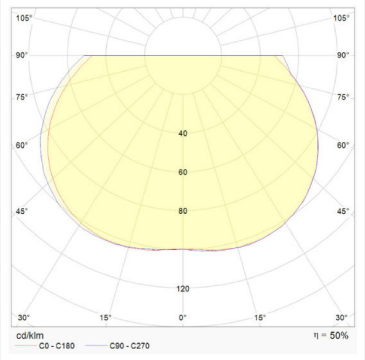

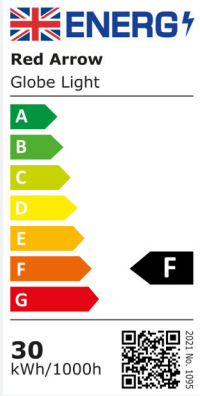

Tel: 0114 279 8999 | **Email: sales@redarrowelectrical.co.uk** | redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF

This document is uncontrolled if printed, all information is subject to change. Generated on 18/08/26