
WEATHERGUARD SITE PLUG & COUPLER

IP65 NON-CORROSIVE FITTINGS C/W 1M FLEX, PLUG & COUPLER

Weatherguard Site offers the very latest in IP65 non-corrosive site lighting. High efficiency 100 lm/W LEDs and stainless steel clips as standard, plus LEDs and drivers that can easily be replaced at the end of life, for minimum environmental impact. For fast and efficient installation, Weatherguard Site is now available pre-wired with 1m of cable each side with a plug and coupler. Save time and money on site.



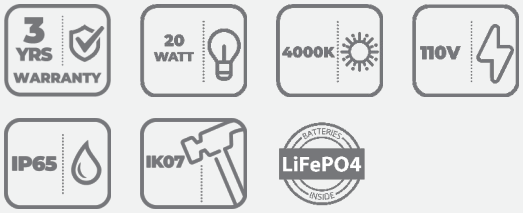

Features

- Pre-wired with 1m Flex Plug/Coupler
- Fast and easy to install
- High efficacy - 100lm/W
- Unique, future proof replaceable LED module
- Stainless steel diffuser clips as standard

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
WGS220Y-E-1M/PS	Weatherguard Site 600mm c/w 3HR Emergency c/w 1m Flex Plug/Coupler	2000lm	263 lm	20W	100 lm/W

Product Information

Warranty	3 Years
Emergency Battery Warranty	3 Years
Colour Appearance (CCT)	4000K
IP Rating	IP65
IK Rating	IK07
Emergency Battery Type	LiFePO4

Colour Finish	Yellow RAL1007
LED Life Expectancy	L80B50 30,000 Hours
Power Factor	0.5
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE

Tel: 0114 279 8999 | **Email: sales@redarrowelectrical.co.uk** | redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF

This document is uncontrolled if printed, all information is subject to change. Generated on 05/09/26

Voltage	110V
Material (Body/Housing)	Polycarbonate
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra >80

Electrical Class	Class I
Working Temperature	0°C to 40°C
EM Working Temperature	0°C to 40°C

SITE LIGHTING SPECIFICATION SHEET

WEATHERGUARD SITE PLUG & COUPLER

IP65 NON-CORROSIVE FITTINGS C/W 1M FLEX, PLUG & COUPLER


Packaging Information

Dimensions (mm)	L: 664 x W: 103 x D: 78 mm
Product Net Weight (kg)	1.57 kg
Barcode	5055807626736
Box Dimensions (mm)	L: 935 x W: 80 x D: 105 mm
Box Gross Weight (kg)	1.8 kg

Units/Outer Carton	8
Outer Carton Barcode	15055807626733
Outer Carton Dimensions (mm)	L: 955 x W: 240 x D: 340 mm
Outer Carton Gross Weight (kg)	14.36 kg






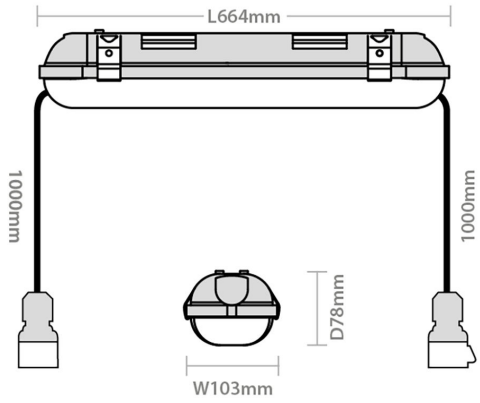


Tel: 0114 279 8999 | **Email: sales@redarrowelectrical.co.uk** | redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF

This document is uncontrolled if printed, all information is subject to change. Generated on 05/09/26

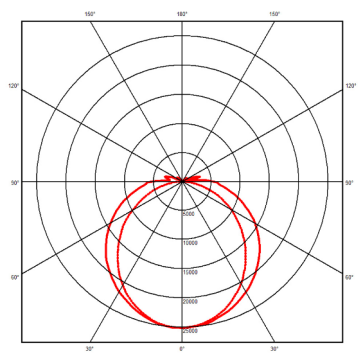

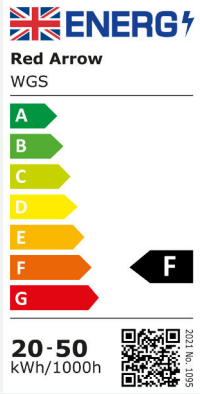
ENERG
Red Arrow
WGS
A
B
C
D
E
F
G
F
20-50
kWh/1000h
2021/341
1095